Set-Up & Safety Instructions

1 800 637-3656

www.twisterdisplay.com

Parts List

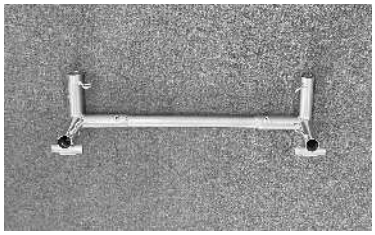

Base Unit: Quantity-1

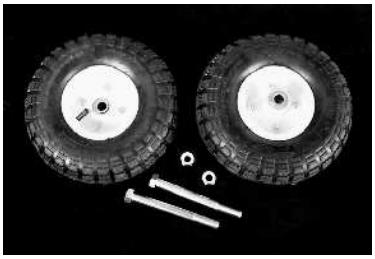

Tires (with 5/8 bolts and lock nuts): Quantity-2

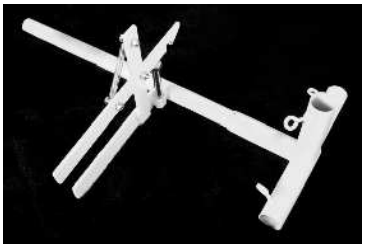

Trigger Unit: Quantity-1

Bucket Assembly: Quantity-1

Collar: Quantity-1

Corner Fitting: Quantity-5

24” Pipe: Quantity-2

44.5” Tapered Pipe: Quantity-4

41.5” Pipe: Quantity-8

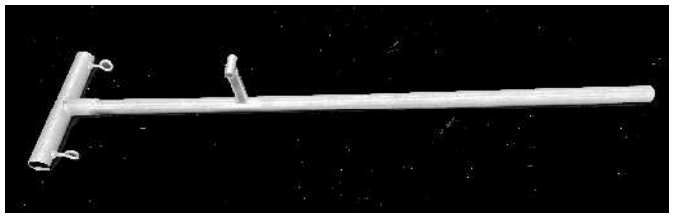

Target Cross Brace: Quantity-1

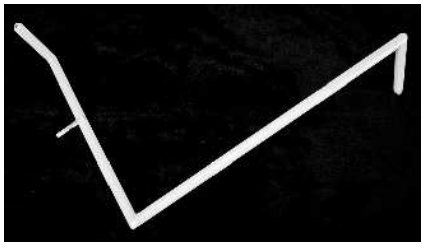

Target Arm: Quantity-1

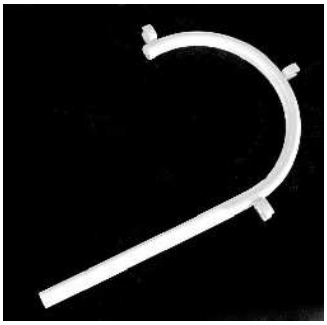

Filler Tube Hook: Quantity-1

Filler Tube:

Quantity-1

Target: Quantity-1

Sponge Balls:

Quantity-6

Drum Pump: Quantity-1

Filler Tube Clips:

Quantity-4

Vinyl Canvas:

Quantity-1

Guar Gum:

Quantity-8

(8 ounce bags)

Green/Yellow Food Dye:

Quantity-8

(16 ounce bottles)

Drum: Quantity-1

Assembly Instructions

Attach two 41.5” inch pipes to the base unit. Then, using two corner fittings, attach a 24” inch pipe to create a rectangle, as pictured.

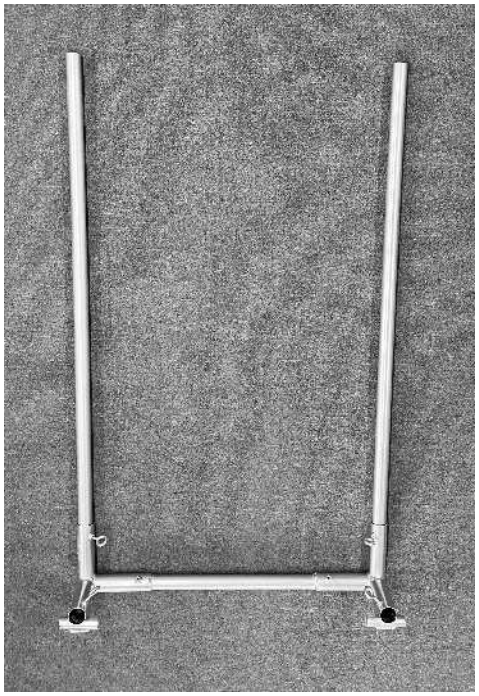

Attach tires to the base unit, with the 5/8” bolt and lock nut. (The nut goes on the inside side of the tire.)

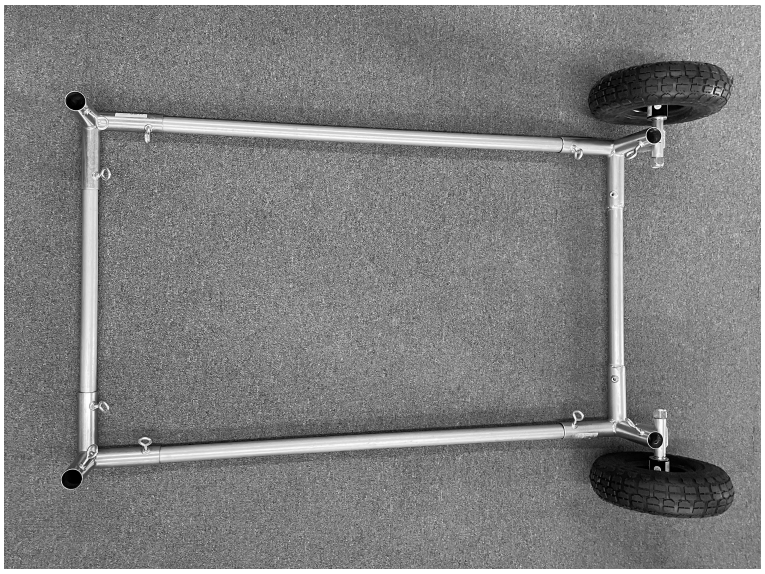

Assembly Instructions

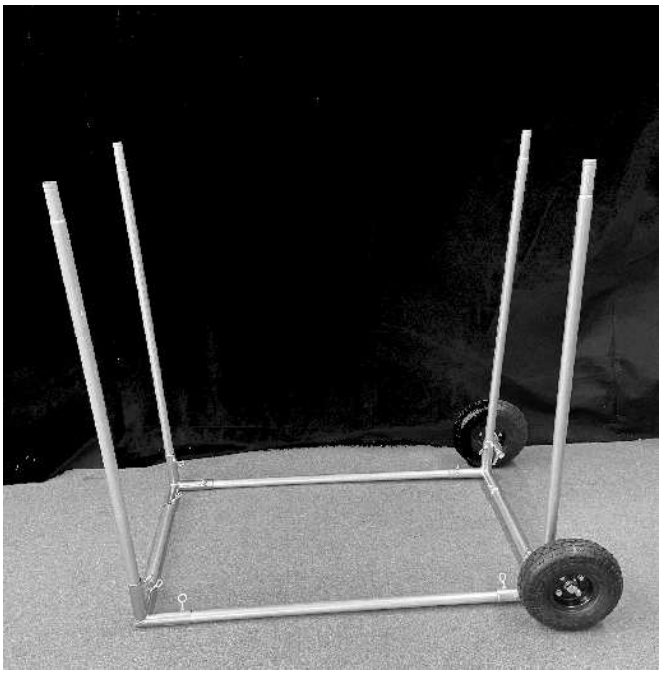

Insert a 44.5” tapered pipe in each corner fitting of the base unit. (The tapered end goes up.)

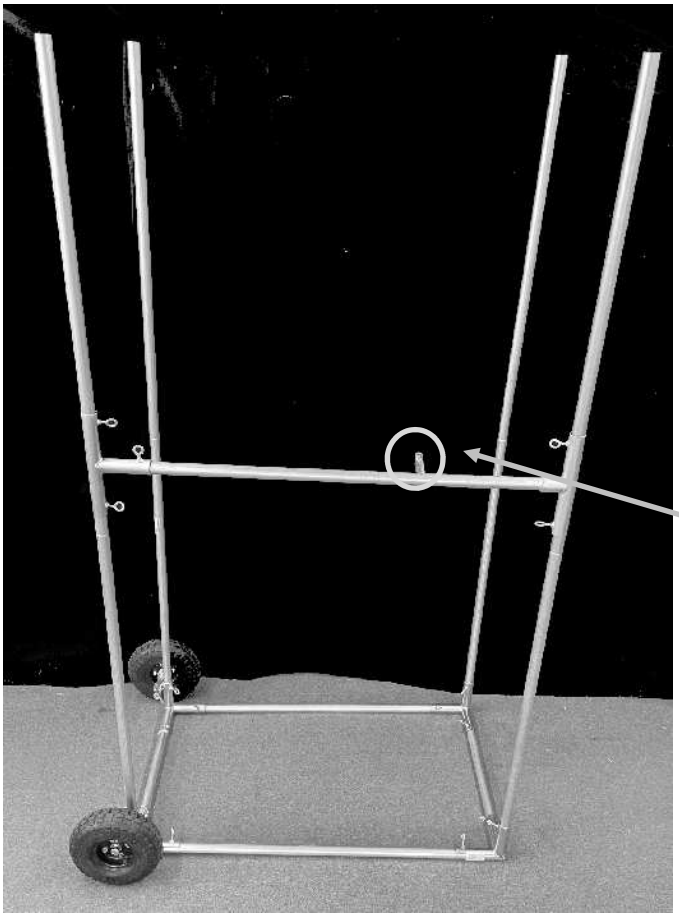

Insert a 41.5” pipe onto each tapered pipe .

Put the target arm cross brace onto the two front pipes.

IMPORTANT *NOTE: The arm pivot tube goes on the inside and is on the opposite side from the wheels.*

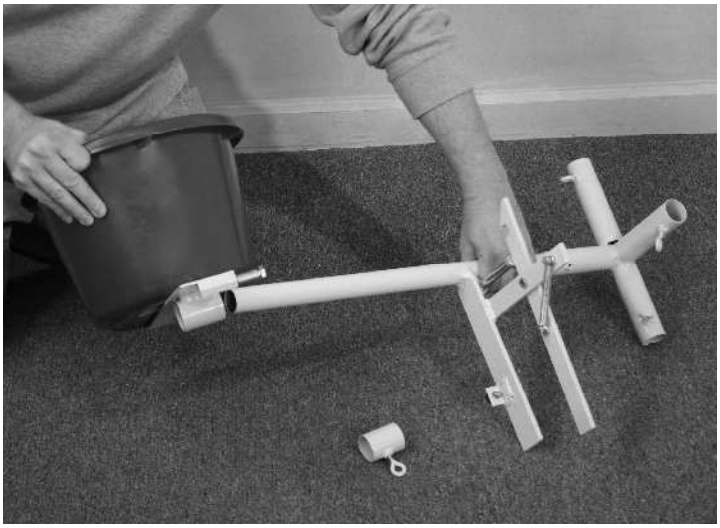

Slide the bucket assembly onto the trigger unit. Make sure that it is positioned so that the roller engages with the trigger hook.

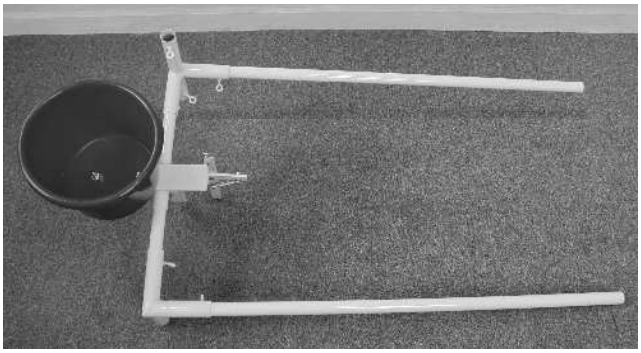

Insert the remaining 41.5” pipes into the corner fitting and tighten.

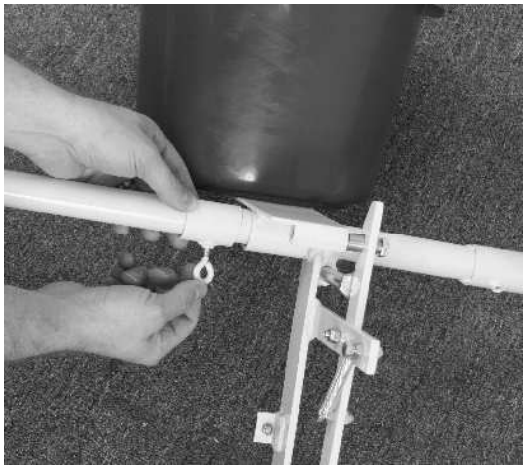

Slide on the collar and tighten.

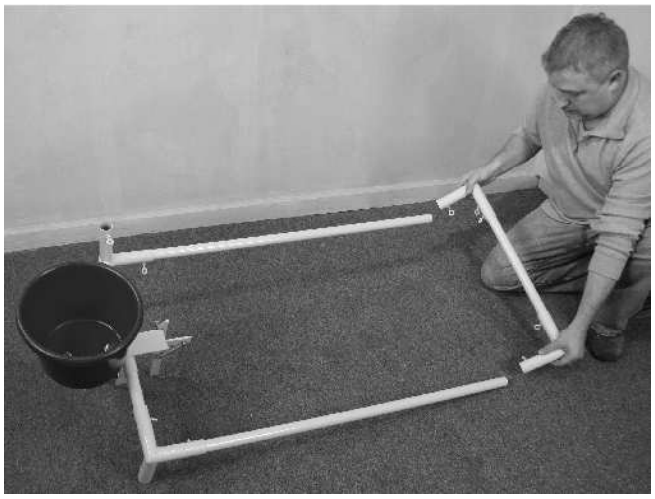

Place the remaining two corner fittings onto either end of the 24” pipe. Be sure to slide them completely on, but do not tighten. Attached these corner fittings to the opposite ends of the 41.5” pipes. (Leaving the corner fittings loose will help to guide them onto the pipes.) Tighten all fittings.

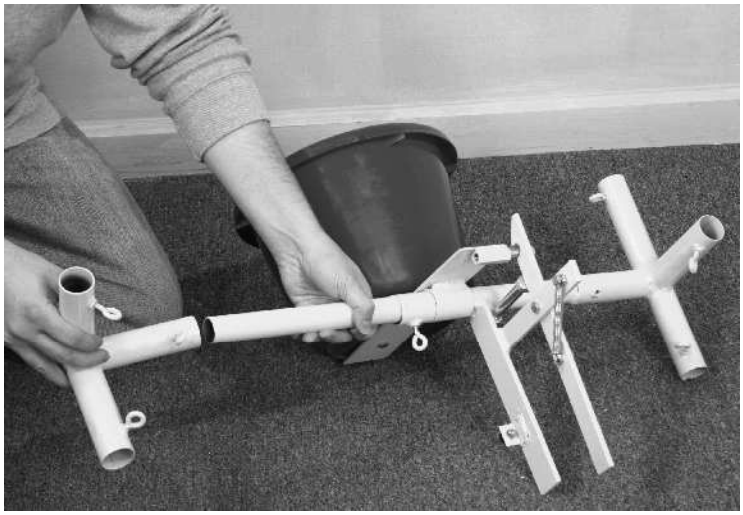

Slide on a corner fitting and tighten.

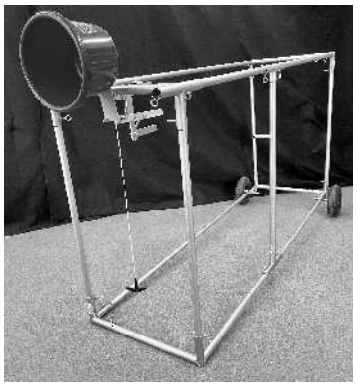

Tip the unit onto its side. Block the tires and find items to elevate the unit about a foot or so. Place the top on the unit, and tighten.

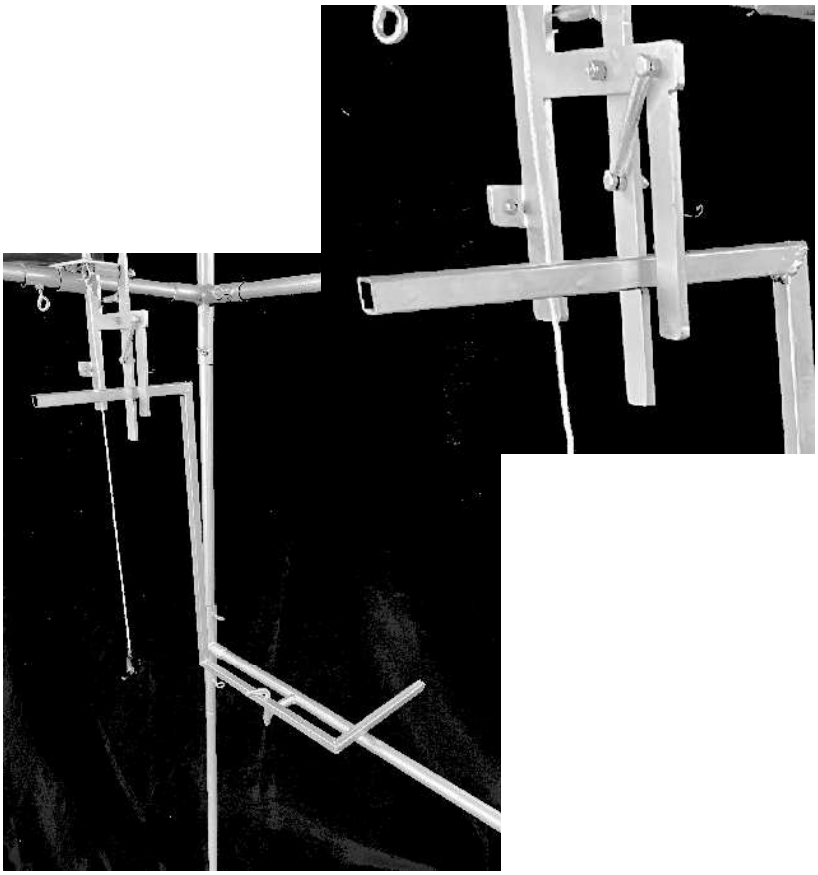

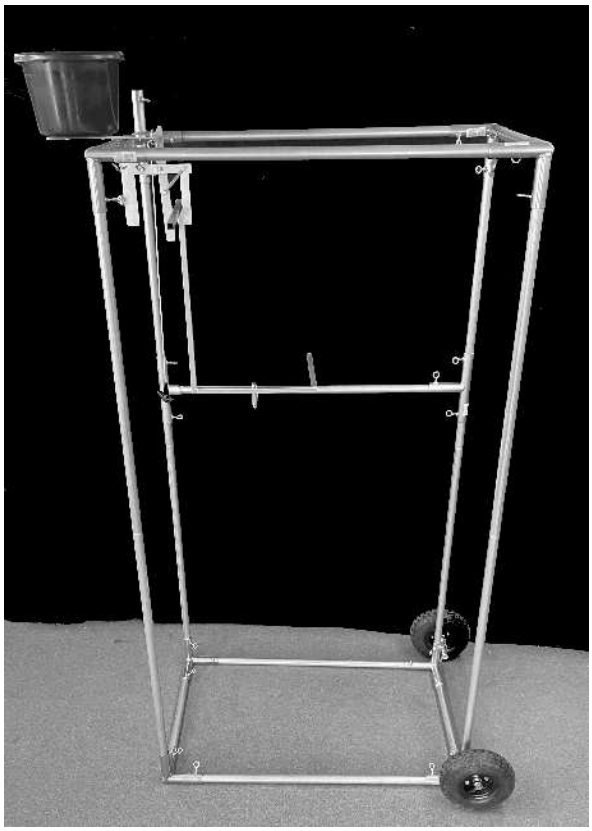

Drop arm pin into pivot tube. Be sure to slide the top of the arm between the latch plate and the vertical plate on the trigger unit.

Insert filler tube hook and tighten.

The drum can be attached to the base using the ratchet strap.

Attach filler tube. To the hook. Use the clips to route the filler tube along the frame.

Insert the pump into the bung on the drum. The connect the filler tube to the pump.

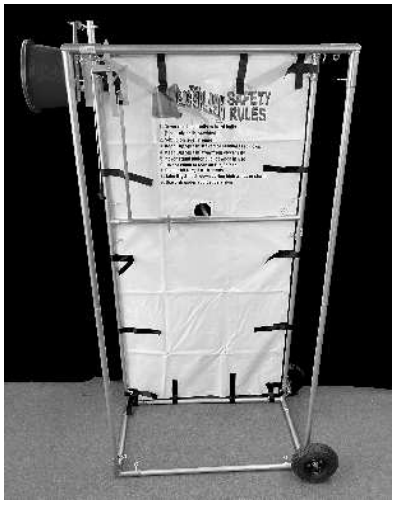

Attach the canvas to the frame with the Velcro straps.

Slime Mixture - Texture & Color

(With Guar Gum for authentic "Slime" feel)

8 ounce of guar gum

Create a fine mist with a garden hose sprayer.

<u>VERY SLOWLY</u> sprinkle about half of the guar gum into the mist.

6-8 caps full of green food dye

Once the drum is half filled (and the guar gum half used), stop and stir thoroughly. NOTE: A cordless drill with a mixing attachment works perfectly for this.

Continue spraying the water and sprinkle the remainder of the guar gum into the mist.

Add 6-8 caps full of green food dye and mix. <u>NOTE: The food dye is undiluted and will stain.</u>

Slime Mixture - Color Only
(Water and dye only)

6-8 caps full of green food dye

Fill the drum with water, then add 6-8 caps full of green food dye and mix. <u>NOTE: The food dye is undiluted and will stain.</u>

NOTE: A cordless drill with a mixing attachment works perfectly for this.

Safety Instructions

- ***Never use baseballs or hard balls. (Use only the balls provided.)***
- ***Set up on level ground.***
- ***Keep Slime Machine staked and/or sand-bagged for stability.***
- ***Keep Slime Machine away from electricity.***
- ***Never stand under the bucket when in use.***
- ***Do not allow anyone to climb on or lean against the Slime Machine.***
- ***Do not allow anyone to hit the target with their hand.***
- ***Take down the Slime Machine if there is high wind or chance of lightening.***